

CERTIFICATE

of constancy of performance

1922 - CPR - 1551

In compliance with Regulation (EU) 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

Fire detection and fire alarm systems. Fire alarm devices. Sounders. Visual alarm devices. Short-circuit isolators. Multitek AS-02 intelligent addressable sounder and flasher with built-in isolator (red)

(For list of controlled characteristics, see Annexes I, II, III to 1922 - CPR - 1551 that are an inseparable part of this certificate)

placed on the market under the name or trade mark of

Multitek Elektronik Sanayi ve Ticaret A.Ş.

Meclis Mah. Atatürk Cad. No:47 34785 Sancaktepe/ İstanbul/ Türkiye

and produced in the manufacturing plant of

BT-001

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standards

EN 54-3:2001, EN 54-3:2001/A1:2002, EN 54-3:2001/A2:2006; EN 54-23:2010; EN 54-17:2005, EN 54-17:2005/AC:2007;

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

This certificate was first issued on 12.04.2021 and will remain valid until 10.02.2024 as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit and is reissued after each surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address www.dedal-bg.net.



Manager:

Baumba

dipl. eng. Anna Vasileva


Issued:
Burgas, 10 February 2023

Ref. No. 03-00

ANNEX I TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922-CPR-1551/ 10.02.2023

Performance list, acc. to EN 54-3:2001, EN 54-3:2001/A1:2002, EN 54-3:2001/A2:2006

Essential Characteristics	Performance	Clause
Performance parameters under fire conditions		
- Sound level	Pass	4.2
- Frequencies and sound pattern	Pass	4.3
- Reproducibility	Pass	5.2
- Operational performance	Pass	5.3
- Attention drawing signal and message broadcast sequences	N/A	C.3.1
- Synchronisation	N/A	C.3.2
- Broadcast message performance	N/A	C.5.1
- Attention drawing signal/silence/message sequence timing	N/A	C.5.2
- Message synchronization testing	N/A	C.5.3
Operational reliability		
- Durability	Pass	4.4
- Construction	Pass	4.5
- Marking and data	Pass	4.6
- Durability	Pass	5.4
- General testing	N/A	C.4
Durability of operational reliability, temperature resistance		
- Dry heat (operational)	Pass	5.5
- Dry heat (endurance)	N/A	5.6
- Cold (operational)	Pass	5.7
- Damp heat, cyclic (operational)	Pass	5.8
- Damp heat, steady state (endurance)	Pass	5.9
Durability of operational reliability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	5.8
- Damp heat, steady state (endurance)	Pass	5.9
- Damp heat, cyclic (endurance)	N/A	5.10
Durability of operational reliability, corrosion resistance		
- Sulphur dioxide (SO ₂) corrosion (endurance)	Pass	5.11
Durability of operational reliability, shock and vibration resistance		
- Shock (operational)	Pass	5.12
- Impact (operational)	Pass	5.13
- Vibration, sinusoidal (operational)	Pass	5.14
- Vibration, sinusoidal (endurance)	Pass	5.15
Durability, electrical stability		
- Electromagnetic compatibility (EMC), immunity (operational)	Pass	5.16
Durability of operational reliability, resistance to ingress		
- Enclosure protection	Pass	5.17

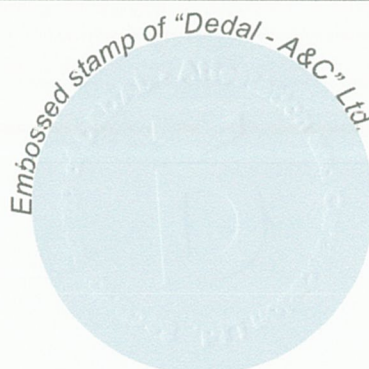

Manager:

Anna Vasileva

dipl. eng. Anna Vasileva

Issued:
Burgas, 10 February 2023

Ref. No. 03-00

ANNEX II TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922-CPR-1551/ 10.02.2023

Performance list, acc. to EN 54-23:2010

Essential Characteristics	Performance	Clause
Operational reliability		
- Duration of operation	Pass	4.2.1
- Provision for external conductors	Pass	4.2.2
- Flammability of materials	Pass	4.2.3
- Enclosure protection	Pass	4.2.4
- Access	Pass	4.2.5
- Manufacturer's adjustments	Pass	4.2.6
- On-site adjustment of behavior	N/A	4.2.7
- Requirements for software controlled devices	Pass	4.2.8
Performance parameters under fire conditions		
- Coverage volume	Pass	4.3.1
- Variation of light output	Pass	4.3.2
- Minimum and maximum light intensity	Pass	4.3.3
- Light colour	Pass	4.3.4
- Light pattern and frequency of flashing	Pass	4.3.5
- Marking and data	Pass	4.3.6
- Synchronisation	N/A	4.3.7
Durability, temperature resistance		
- Dry heat (operational)	Pass	4.4.1.1
- Dry heat (endurance)	N/A	4.4.1.2
- Cold (operational)	Pass	4.4.1.3
Durability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	4.4.2.1
- Damp heat, steady state (endurance)	Pass	4.4.2.2
- Damp heat, cyclic (endurance)	N/A	4.4.2.3
Durability, shock and vibration resistance		
- Shock (operational)	Pass	4.4.3.1
- Impact (operational)	Pass	4.4.3.2
- Vibration, sinusoidal (operational)	Pass	4.4.3.3
- Vibration, sinusoidal (endurance)	Pass	4.4.3.4
Durability of operational reliability, corrosion resistance		
- Sulphur dioxide (SO ₂) corrosion (endurance)	Pass	4.4.4
Durability, electrical stability		
- Electromagnetic compatibility (EMC), immunity (operational)	Pass	4.4.5



Manager:

Anna Vasileva



dipl. eng. Anna Vasileva

Issued:
Burgas, 10 February 2023

Ref. No. 03-00

**ANNEX III TO CERTIFICATE OF CONSTANCY OF PERFORMANCE
1922-CPR-1551/ 10.02.2023**

Performance list, acc. to EN 54-17:2005; EN 54-17:2005/AC:2007

Essential Characteristics	Performance	Clause
Performance under fire conditions		
- Reproducibility	Pass	5.2
Operational reliability		
- Requirements	Pass	4
Durability of operational reliability, temperature resistance		
- Dry heat (operational)	Pass	5.4
- Cold (operational)	Pass	5.5
Durability of operational reliability, vibration resistance		
- Shock (operational)	Pass	5.9
- Impact (operational)	Pass	5.10
- Vibration, sinusoidal (operational)	Pass	5.11
- Vibration, sinusoidal (endurance)	Pass	5.12
Durability of operational reliability, humidity resistance		
- Damp heat, cyclic (operational)	Pass	5.6
- Damp heat, steady state (endurance)	Pass	5.7
Durability of operational reliability, corrosion resistance		
- Sulphur dioxide (SO ₂) corrosion (endurance)	Pass	5.8
Durability of operational reliability, electrical stability		
- Variation of supply parameters	Pass	5.3
- Electromagnetic compatibility (EMC), immunity tests (operational)	Pass	5.13

This certificate was first issued on 12.04.2021 and will remain valid until 10.02.2024 as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit and is reissued after each surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address www.dedal-bg.net.



Manager: *Anna Vasileva*
dipl. eng. Anna Vasileva

Issued:
Burgas, 10 February 2023
Ref. No. 03-00